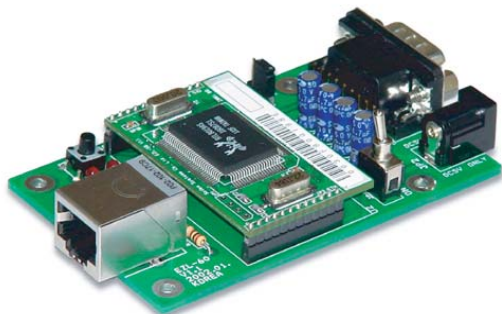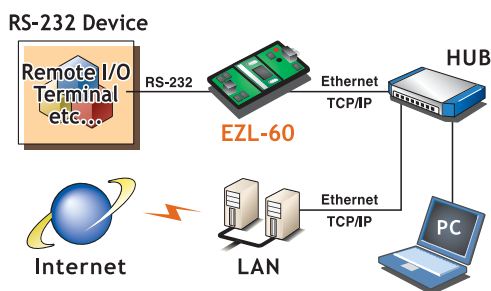# EZL-60 Summary Data Sheet

small size TCP/UDP/IP converter
10Base-T interface
1 serial port (RS232 level)
firmware downloadable via TFTP
DHCP, PPPoE support
easy configuration (ezConfig)
AT command emulation support
EZL-50 + extension B/D

Specifications

Power	Input Voltage	5V ± 0.5V
	Current	MAX 130 mA
Dimension	100mm x 55mm x 21mm	
Weight	about 50g	
Interface	Serial	9pin Dsub male
	Ethernet	10Base-T RJ45
Serial	RS232 level(1200bps ~ 230400bps)	
Ethernet	10Base-T	
Protocols	TCP, UDP, IP, ICMP, ARP, TELNET, DHCP, PPPoE	
Firmwares	T2S	TCP, Server mode
	COD	TCP, Client mode
	ATC	TCP, Server/Client (AT emulation)
	U2S	UDP
	frimware downloadable via ethernet using TFTP client	
Utilities	ezConfig	configuration utility
	Hotflash	firmware download utility
	Ezterm	socket communication utility

System Diagram

Applications

remote monitoring systems
remote metering systems
remote fire fighting equipment systems
air circulator remote control
ATM systems
health check systems
security systems
traffic display systems
etc.