

EZL-200A Summary Data Sheet




Serial Device Server
 10Base-T interface
 1 serial port (RS232 level)
 firmware downloadable via TFTP
 DHCP, PPPoE support
 easy configuration (ezConfig)
 AT command emulation support
 management via telnet

Specifications

Power	Input Voltage	5V \pm 0.5V
	Current	MAX210 mA
Dimension	137mm x 78mm x 28mm	
Weight	about 320g	
Interface	Serial	9pin Dsub male
	Ethernet	10Base-T RJ45
Serial	RS232 level(1200bps ~ 115200bps)	
Ethernet	10Base-T	
Protocols	TCP, UDP, IP, ICMP, ARP, TELNET, DHCP, PPPoE	
Communication Modes	T2S	TCP, Server mode
	COD	TCP, Client mode
	ATC	TCP, Server/Client (AT emulation)
	U2S	UDP
Utilities	ezConfig	configuration utility
	Hotflash	firmware download utility
	Ezterm	socket communication test utility

System Diagram

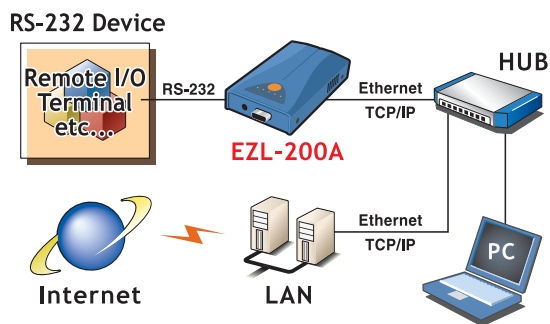

Applications

remote monitoring systems
 remote metering systems
 remote fire fighting equipment systems
 air circulator remote control
 ATM systems
 health check systems
 security systems
 traffic display systems
 etc.

