

EZL-70 Summary Data Sheet




- small size TCP/UDP/IP converter
- 10Base-T interface
- 1 serial port (5V-TTL, RS232, RS422, RS485 level)
- firmware downloadable via TFTP
- DHCP, PPPoE support
- easy configuration (ezConfig)
- AT command emulation support

Specifications

Power	Input Voltage	5V \pm 0.5V
	Current	60mA
Dimension	60 mm x 40 mm x 17 mm	
Weight	about 20g	
Interface	Serial	2.54mm pitch 1x6 connector
	Ethernet	10Base-T RJ45
Serial	5V-TTL, RS232, RS422, RS485 level (1200bps ~ 115200bps)	
Ethernet	10Base-T	
Protocols	TCP, UDP, IP, ICMP, ARP, DHCP, PPPoE	
Firmwares	T2S	TCP, Server mode
	COD	TCP, Client mode
	ATC	TCP, Server/Client (AT emulation)
	U2S	UDP
	firmware downloadable via ethernet with TFTP client	
Utilities	ezConfig	configuration utility
	Hotflash	firmware download utility
	Ezterm	socket communication utility

System Diagram

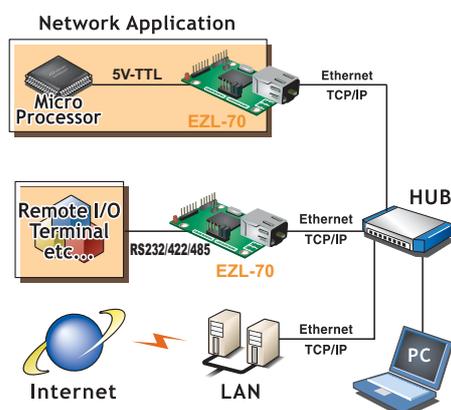

Applications

- remote monitoring systems
- remote metering systems
- remote fire fighting equipment systems
- air circulator remote control
- ATM systems
- health check systems
- security systems
- traffic display systems
- etc.



Sollae Systems Co., Ltd.
<http://www.ezTCP.com>

Technical support: support@eztcp.com
 Sales: sales@eztcp.com