

EZL-200F Summary Data Sheet




- Secure Serial Device Server
- 10/100Base-T Interface
- 1 serial port (RS232/422/485)
- SSL Secure Communication
- Multi Monitoring
- firmware downloadable via TFTP and Serial
- DHCP, PPPoE support
- easy configuration (ezConfig)
- AT command emulation support
- management via telnet

Specifications

Power	Input Voltage	5V \pm 0.5V
	Current	320 mA typical
Dimension	136mm x 83mm x 29mm	
Weight	about 140g	
Interface	Serial	9pin Dsub male
	Ethernet	10/100Base - T RJ45
Serial	RS232 (1200bps ~ 115200bps), RS422(Full Duplex), RS485(Half Duplex)	
Ethernet	10/100Base-T Auto-Sensing, Auto MDI/MDIX	
Protocols	TCP, UDP, IP, ICMP, ARP, TELNET, DHCP, PPPoE	
Secure Protocols	SSL 3.0, TLS 1.0	
Communication Modes	T2S	TCP, Server mode
	COD	TCP, Client mode
	ATC	TCP, Server/Client (AT emulation)
	U2S	UDP
Utilities	ezConfig	configuration utility
	Hotflash	firmware download utility
	Ezterm	socket communication test utility

System Diagram

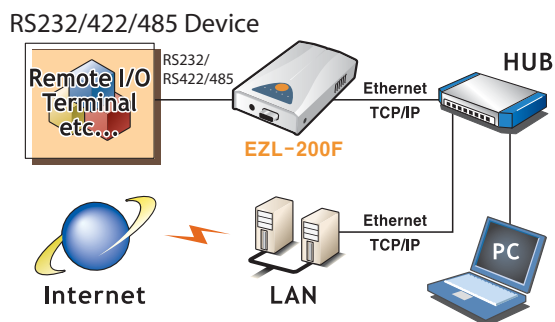

Applications

- remote monitoring systems
- remote metering systems
- remote fire fighting equipment systems
- air circulator remote control
- ATM systems
- health check systems
- security systems
- traffic display systems
- etc.

