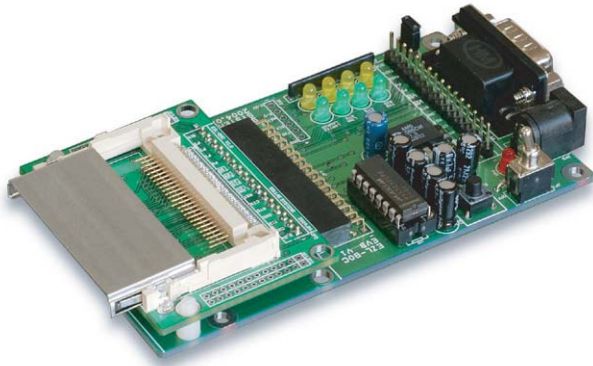# EZL-90 Summary Data Sheet
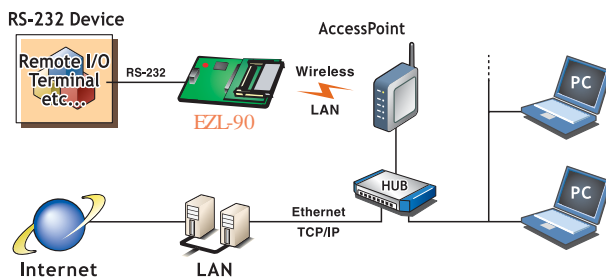
small TCP/IP converter
CF card interface
IEEE802.11b wireless LAN support
1 serial port (RS232 level)
infrastructure & ad-hoc support
firmware downloadable via serial
DHCP support
easy configuration (ezConfig)
AT command emulation support
EZL-80c + extension B/D

Specifications

Power	Input Voltage	5V
	Current	MAX 250mA (It depends on CF card)
Dimension	60mm x 123mm x 21mm	
Weight	about 60g	
Interface	Serial	9pin Dsub male
	Network	CF card
Serial	RS232 level(1200bps ~ 115200bps)	
Network	IEEE802.11b wireless LAN (infrastructure/ad-hoc)	
Protocols	TCP, UDP, IP, ICMP, ARP, DHCP, WEP	
Communication Modes	T2S	TCP, Server mode
	COD	TCP, Client mode
	ATC	TCP, Server/Client (AT emulation)
	U2S	UDP
Utilities	ezConfig	configuration program utility
	wflash	firmware download utility
	ezterm	socket communication test utility

System Diagram

Applications

remote monitoring systems
remote metering systems
remote fire fighting equipment systems
air circulator remote control
ATM systems
health check systems
security systems
traffic display systems
etc.

Sollae Systems Co., Ltd.
http://www.ezTCP.com

Technical support: support@eztcp.com
Sales : sales@eztcp.com